

WxSC800-333081

LTE Cat1 Infrared grating radiation perimeter alarm & RTU 2-in-1 Terminal

Product Highlights

- ❖ LTE Cat1 Infrared grating radiation perimeter alarm & RTU 2-in-1 Terminal
- ❖ 2-in-1 smart sensor(s) and RTU terminal product
- ❖ Optional DC 12V power supply
- ❖ Optional Battery power supply (ER34615H 19,000mAh/ER34615M 13,500mAh)
- ❖ It can monitor the intrusion in a certain area and trigger the alarm
- ❖ Expandable with 2 of 14 types PSS gas sensors with aluminum sleeve enclosure
- ❖ Up to 8 working simultaneously including sensors and controllers; Customization needed if more than 8 working at the same time
- ❖ RTU controlling signal and interfaces OD/PWR triggered by sensor(s) data or OTA command for solenoid valve or other devices
- ❖ Optional (Public/Private) IoT cloud platform PolySuite iView

Products includes following parts:

- ❖ WxSC800 LTE Cat1 Smart IoT and RTU 2-in-1 Terminal
- ❖ ENC-102001 WxS Series 4.0 Enclosure(ϕ 145x90x55mm, IP67)
- ❖ PSS-333081 Infrared grating radiation perimeter alarm (1 pair), IP67

Configuration Tool

- ❖ iEdge4.0 WxS IoT Terminal products can be configured with PolySuite software-visual based Configuration Tool or CLI interface command or OTA via IoT platform, such as PolySuite PaaS platform iView.
- ❖ Download link <http://ota.polysense.online/wincc/ConfigurationTool.rar>

Product Image

- ❖ The shell is WxS Series 4.0 Enclosure(ϕ 145x90x55mm, IP67) , as shown in the figure below
- ❖ The sensor is externally connected. See the following document PSS-333081 for the sensor picture



WxSC800

LTE Cat1 Smart IoT and RTU 2-in-1 Terminal

Related Products

Product .	Interf.	Descriptions
WxSC800	11MPI+RS485+OD*2+PWR*2	LTECat1 Smart IoT and RTU 2-in-1 Terminal(Inc.WxSC8xx,PSM-xx00,PSB-BD01,&Enclosure)
WxSC801	RS485+OD*2+PWR*2	LTECat1 Smart IoT and RTU 2-in-1 Terminal (Inc.WxSC8xx,PSM-xx01,PSB-BD01,&Enclosure)
WxSC802	0-20mA*1+OD*2+PWR*2	LTECat1 Smart IoT and RTU 2-in-1 Terminal(Inc.WxSC8xx,PSM-xx02,PSB-BD01,&Enclosure)
WxSC803	0-20mA*4+OD*2+PWR*2	LTECat1 Smart IoT and RTU 2-in-1 Terminal(Inc.WxSC8xx,PSM-xx03,PSB-BD01,&Enclosure)
WxSC804	0-3.3V*2+OD*2+PWR*2	LTECat1 Smart IoT and RTU 2-in-1 Terminal(Inc.WxSC8xx,PSM-xx04,PSB-BD01,&Enclosure)
WxSC805	0-3.3V*4+OD*2+PWR*2	LTECat1 Smart IoT and RTU 2-in-1 Terminal(Inc.WxSC8xx,PSM-xx05,PSB-BD01,&Enclosure)
WxSC806	0-10V*2+OD*2+PWR*2	LTECat1 Smart IoT and RTU 2-in-1 Terminal(Inc.WxSC8xx,PSM-xx06,PSB-BD01,&Enclosure)
WxSC807	0-10V*4+OD*2+PWR*2	LTECat1 Smart IoT and RTU 2-in-1 Terminal(Inc.WxSC8xx,PSM-xx07,PSB-BD01,&Enclosure)
WxSC808	PT100*1+OD*2+PWR*2	LTECat1 Smart IoT and RTU 2-in-1 Terminal(Inc.WxSC8xx,PSM-xx08,PSB-BD01,&Enclosure)
WxSC809	PT100*5+OD*2+PWR*2	LTECat1 Smart IoT and RTU 2-in-1 Terminal(Inc.WxSC8xx,PSM-xx09,PSB-BD01,&Enclosure)
WxSC80A	Switch*1+OD*2+PWR*2	LTECat1 Smart IoT and RTU 2-in-1 Terminal(Inc.WxSC8xx,PSM-xx0A,PSB-BD01,&Enclosure)
WxSC80B	Switch*5+OD*2+PWR*2	LTECat1 Smart IoT and RTU 2-in-1 Terminal(Inc.WxSC8xx,PSM-xx0B,PSB-BD01,&Enclosure)
WxSC80C	Unibus*1+OD*2+PWR*2	LTECat1 Smart IoT and RTU 2-in-1 Terminal(Inc.WxSC8xx,PSM-xx0C,PSB-BD01,&Enclosure)
WxSC80D	Unibus*18+OD*2+PWR*2	LTECat1 Smart IoT and RTU 2-in-1 Terminal(Inc.WxSC8xx,PSM-xx0D,PSB-BD01,&Enclosure)
WxSC80E	IIC*1+OD*2+PWR*2	LTECat1 Smart IoT and RTU 2-in-1 Terminal(Inc.WxSC8xx,PSM-xx0E,PSB-BD01,&Enclosure)
WxSC80F	SPI*1+OD*2+PWR*2	LTECat1 Smart IoT and RTU 2-in-1 Terminal(Inc.WxSC8xx,PSM-xx0F,PSB-BD01,&Enclosure)
WxSC80G	Uart*2+OD*2+PWR*2	LTECat1 Smart IoT and RTU 2-in-1 Terminal(Inc.WxSC8xx,PSM-xx0G,PSB-BD01,&Enclosure)
WxSC80H	Uart*3+OD*2+PWR*2	LTECat1 Smart IoT and RTU 2-in-1 Terminal(Inc.WxSC8xx,PSM-xx0H,PSB-BD01,&Enclosure)
WxSC80J	Uart*1+RS485+OD*2+PWR*2	LTECat1 Smart IoT and RTU 2-in-1 Terminal(Inc.WxSC8xx,PSM-xx0J,PSB-BD01,&Enclosure)
WxSC850	Ai/Ao/Di/Pi/Ro/IIC/SPI/Ci + RS232/485/Ro/RJ45	LTE Cat1 Smart RTU

Product Highlights

- ❖ Interfaces supported:
 - MPI:(AIN(0-20mA)*2, PT100*1, VIN(0-10V/0-3.3V)*2, Switch*1 ,Unibus*1, IIC *1, SPI*1, Uart(3.3V TTL)*2), RS485*1
 - RTU interfaces
 - OD*2 output for external devices controlling
 - PWR*2 output for external devices/sensors power supply or customization usage
- ❖ 2-in-1 DC(5V/12V)+Battery(3.6V Li-SOCl2 ER34615H/M) Power Supply, DC in priority
- ❖ Up to 8 working simultaneously including sensors and controllers; Customization needed if more than 8 working at the same time
- ❖ Built-in sensor options including:
 - PSS-403011 IIC Temperature and Humidity Sensor (Indoor)
 - PSS-403012 RS485 Temperature and Humidity Sensor (Indoor)
 - PSS-403013 IIC Temperature and Humidity Sensor (IP67,Outdoor)
 - PSS-403014 RS485 Temperature and Humidity Sensor (IP67,Outdoor)
 - PSS-403015 IIC Temperature and Humidity Sensors (Indoor)

- PSS-403016 RS485 Temperature and Humidity Sensors (Indoor)
- PSS-403017 IIC Temperature and Humidity Sensors (IP67,Outdoor)
- PSS-403018 RS485 Temperature and Humidity Sensors (IP67,Outdoor)
- PSS-403019 IIC Temperature and Humidity Sensors (Indoor)
- PSS-40301A RS485 Temperature and Humidity Sensors (Indoor)
- PSS-40301B IIC Temperature and Humidity Sensors (IP67,Outdoor)
- PSS-40301C RS485 Temperature and Humidity Sensors (IP67,Outdoor)
- PSS-33B011 RS485 illumination Sensor(Indoor)
- PSS-423011 Uart AQI(PM2.5/10, SO2,NO2, O3, CO,Temp,Humidity) PPM Level Sensors
- PSS-423031 Uart IAQ(PM2.5/10, CO2, HCHO, Temp,Humidity) Sensors
- PSS-423041 Uart IAQ(PM2.5/10, CO2, TVOC, Temp,Humidity) Sensors
- PSS-423051 Uart IAQ(PM2.5/10, CO2, HCHO, TVOC,Temp,Humidity)Sensors
- PSS-318711 Uart GPS/Beidou Positioning Sensor
- PSS-318712 RS485 GPS/Beidou Positioning Sensor
- PSS-319311 0-3.3V Tilt / Inclination Sensor (SHM- Structure Health Monitoring)
- PSS-333051 0-3.3V PIR Sensor (3-4 Meters)
- PSS-333052 0-3.3V PIR Sensor (up to 20 Meters)
- PSS-334061 0-3.3V UV Sensor (Range:0-15 grade, outdoor)
- PSS-355051 Switch Uni-Call Button&Controller
- PSS-362011 Uart Sound/Noise Sensor (30~130dB range, Indoor)
- All Gas Sensors with Product No. PSS-21xxxx

❖ Support 1-8 enclosure externally connected sensors

- All enclosure external PSS sensors w/o separate power supply

❖ RTU OD&PWR(PWM) output control inferences

- OD output control interface for controlling external devices such as electric relay,AC contactor, beeper, draught fan, lamps and lantern etc.
- PWR*2 output, one default for external devices/sensors power supply voltage output, one with 3.3V voltage; or customization usage,such as for PWM port
- PWR port signal can be used as PWM output to control stepper moter or lamp
- Sensor(s) data or OTA Command triggered OD/PWR controlling signal&interfaces

❖ Power supply options:

- PSB-BT01 WxS Terminal Battery Power (3.6VDC Output) (3.6V Li-SOCI2 ER34615H/M)
- PSB-BT02 WxS Terminal Battery Power Board (3/5/9/12VDC Output) (3.6V Li-SOCI2 ER34615H/M)
- PSB-DC01 WxS Terminal DC Power Board (Inc.PSP-DC012V)
- PSB-BD01 WxS Terminal Battery (3.6V Li-SOCI2 ER34615H/M)&DC Power Board(Inc.PSP-DC012V)
- Battery capacity ER34615H: 19000mAh/ER34615M: 13500mAh

❖ iEdge 4.0 terminal enclosure options

- ENC-102001 WxS Series 4.0 Enclosure(φ145x90x55mm, IP67)
- ENC-102002 WxS Series 4.0 Poromeric Enclosure(φ145x90x59mm)

- ENC-102003 WxS Series 4.0 High Poromeric Enclosure(ϕ 145x90x70mm)
- ❖ Terminal and sensor parameters configurable with Configuration Tool running on PC
 - LTE Cat1 Bands Supported and SW Configurable
 - LTE Cat1 Uplink Transmission Cycle Configurable
 - Sensor Parameters Configurable
 - Sensor Data Report Cycle Configurable
- ❖ FOTA (Over The Air) firmware upgrade, including to upgrade loader and application images
- ❖ OTA (Over The Air) terminal running parameters supported including output signal
- ❖ Low power consumption, years of battery operational life with 3.6V Li-SOCl₂ ER34615H/M Battery with various scenarios
- ❖ Integrated internal antenna, or optional external SMA/IPEX antenna
- ❖ LTE Cat1 Compliance

Specifications

Parameters	Value
Smart Terminal	
Interfaces	MPI Interfaces-Any Mixture of Following: MPI:(AIN(0-20mA) *2, PT100 *1, VIN(0-10V/0-3.3V) *2, Switch *1 ,Unibus*1, IIC *1, SPI*1, Uart(3.3V TTL)*2), RS485*1 Output Control: OD*2&PWR*2
Data Report	Cross-threshold report, plus periodic report (the threshold and the periodic report cycle are both user-configurable)
Intensive data sampling and averaging	Support intensive data sampling and averaging to improve data accuracy
Wireless	
Regional Parameters	LTE-TDD:B34/B38/B39/B40/B41 LTE-FDD:B1/B3/B5/B8
Data	LTE-TDD: Up and down matching 2 8Mbps (DL) max/2Mbps (UL) max Up and down matching 1 6Mbps (DL) max/4Mbps (UL) max LTE-FDD: Max 10Mbps (DL)/Max 5Mbps (UL)
Sensitivity	FDD B1: -99dBm (10M) FDD B3: -99dBm (10M) FDD B5: -99dBm (10M) FDD B8: -99dBm (10M) TDD B34: -100dBm (10M) TDD B38: -100dBm (10M) TDD B39: -100dBm (10M) TDD B40: -100dBm (10M) TDD B41: -100dBm (10M)
Bandwidth	1.4/3/5/10/15/20MHz



Output power	LTE-TDD: Class3 (23dBm+1/- 3dB) LTE-FDD: Class3(23dBm+-2dB)
Power consumption	1uA @ power off 0.6mA @ Sleep, typical
Interface	1 USB 2.0 high-speed interface (up to 480Mbps); Dual 1.8V/3.0V (U) SIM card interface 2 NETLIGHT interfaces (NET_STATUS and STATUS) 1 channel digital I2S interface, supporting external codec 3 UART interfaces (main serial port, universal serial port, debugging serial port) 1 SPI LCD interface 1 SPI Camera interface PWRKEY (valid at low level) 1 channel ADC interface
Antenna	Integrated internal antenna or external 1/2 wavelength whip antenna (SMA)
Mechanical	
Dimension	3 Enclosure options with different size WxS Series 4.0 Enclosure(φ145x90x55mm, IP67) WxS Series 4.0 Poromeric Enclosure(φ145x90x59mm) WxS Series 4.0 High Poromeric Enclosure(φ145x90x70mm)
IP rating	IP65&IP67
Operating Temperature	-40C to +85C
Total Weight	150 g
Electrical	
Supply Voltage	3.6VDC
Power Type	Replaceable 1 ER34615H/M 3.6V Li-SOCI2 Battery (H/M); DC 4.5V – 12V optional



Configuration Tool

- ❖ iEdge4.0 WxS IoT Terminal products can be configured with PolySuite software-visual based Configuration Tool or CLI interface command or OTA via IoT platform, such as PolySuite PaaS platform iView.
- ❖ Download link <http://ota.polysense.online/wincc/ConfigurationTool.rar>

Installation Guide


- ❖ Below diagram shows the general installation guide for WxSC800, it can be installed on any flat and solid surface:

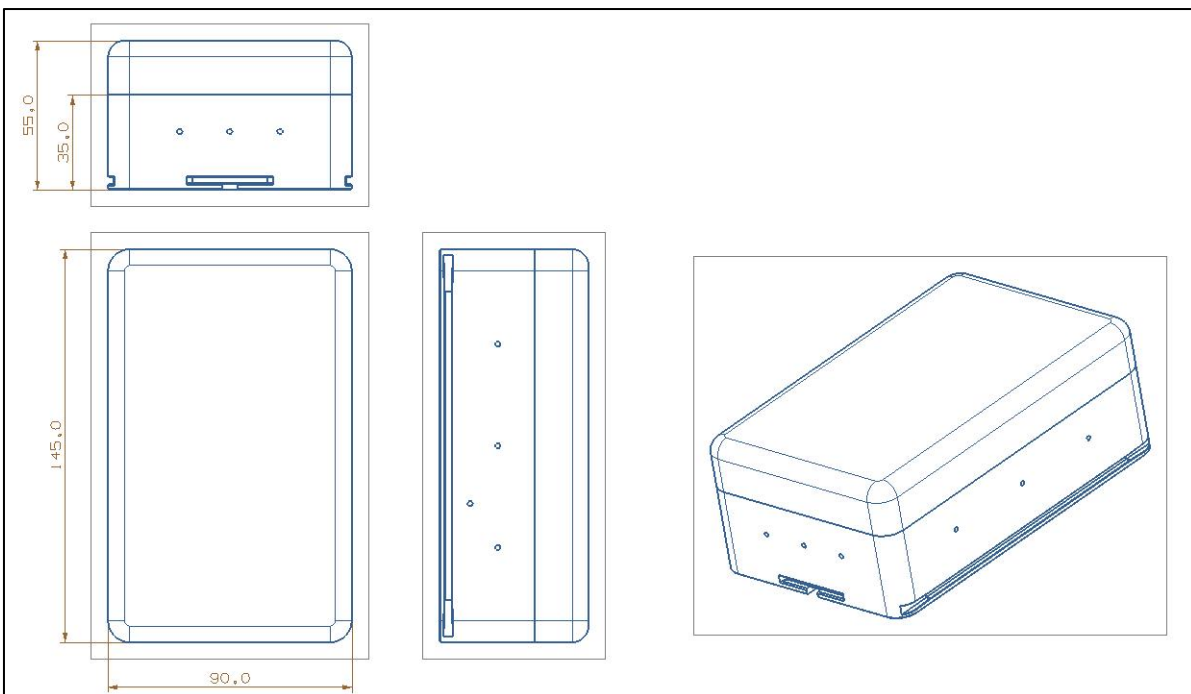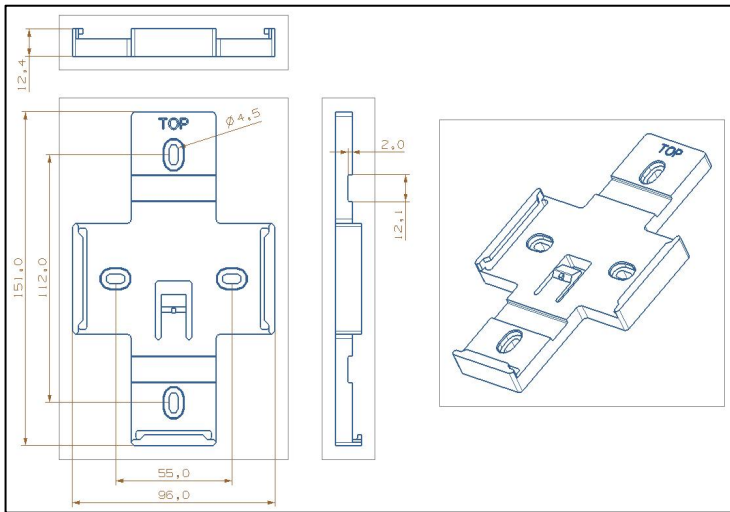

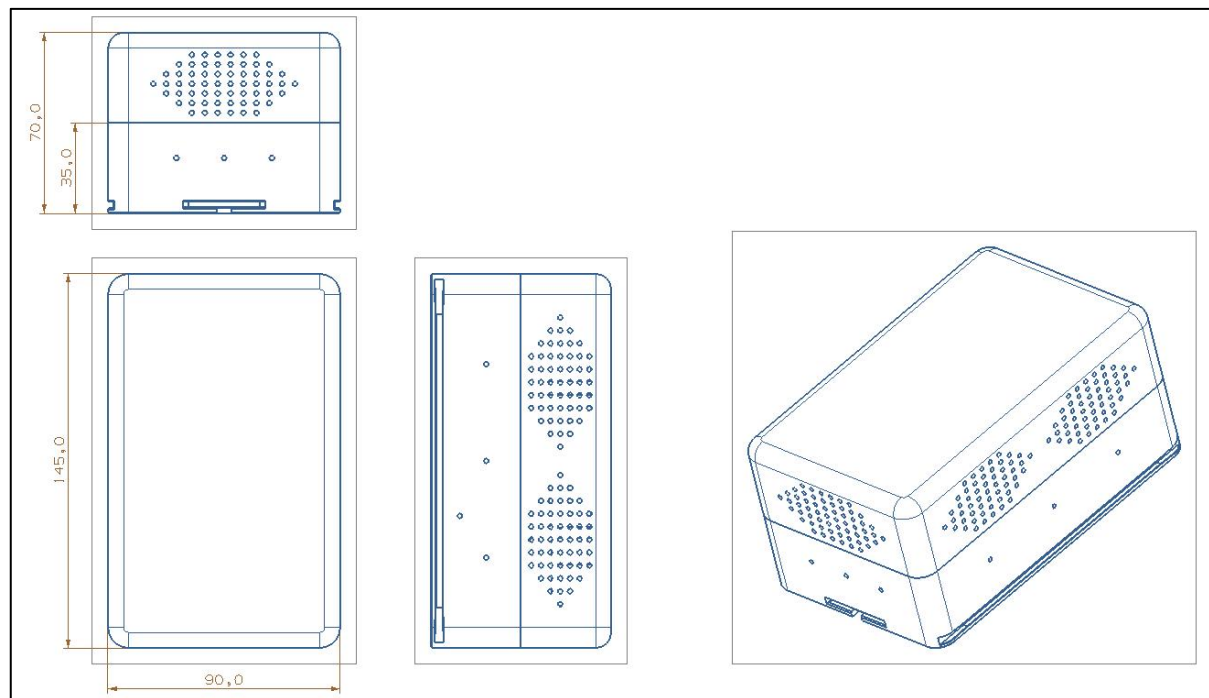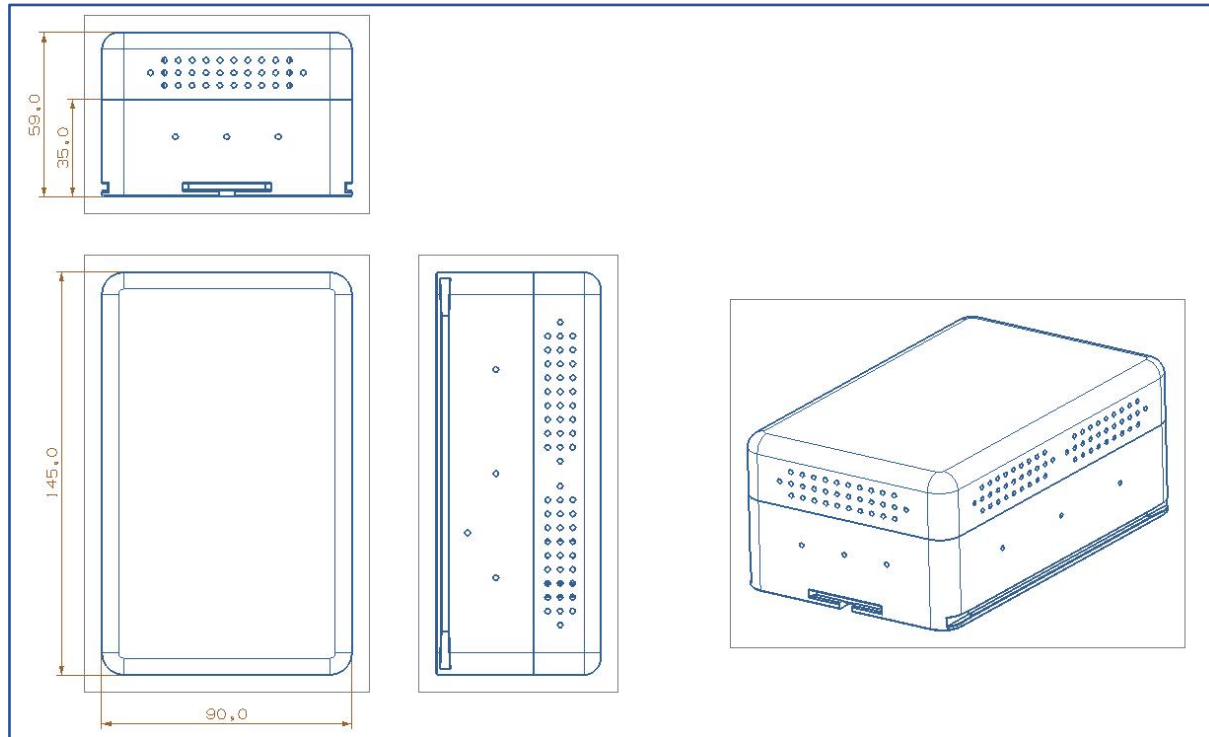

❖ Below is the recommendation of the self-tapping screw and its sizes:

螺纹规格		ST2.2	ST2.9	ST3.5	ST4.2	ST4.8	ST5.5	ST6.3
dk	min	3.7	5.3	6.64	7.64	9.14	10.57	11.57
K	min	1.4	2.15	2.35	2.8	3.4	3.7	4.3
m		1.9	3	3.9	4.4	4.9	6.4	6.9
L		4.5mm~100mm						

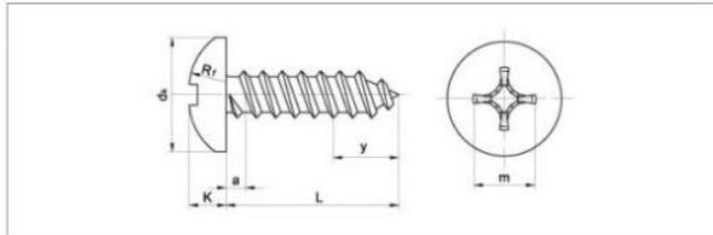

Product Images

❖ WxS Series 4.0 Enclosure(φ145x90x55mm, IP67)



❖ WxS Series 4.0 Poromeric Enclosure(φ145x90x59mm)



❖ WxS Series 4.0 High Poromeric Enclosure(φ145x90x70mm)



PSS-333081

Infrared Grating Radiation Perimeter Alarm

Product introduction

PSS-333081 is a brand new ABT 5th generation variable frequency transmitter. It has the heating only function (heater is required), which effectively relieves frost and can work normally even in cold regions in the north.

Detection principle

It is controlled by a microprocessor. Compared with the traditional logic circuit of other products on the market, the real digital circuit has more accurate and stable signals; "And" or "technical design; Optical correction range: horizontal $\pm 90^\circ$, vertical $\pm 10^\circ$, digital filtering; The environment adaptive function minimizes the false alarm rate and beam interference; Adaptable to various complex environments.

Product features

- ❖ Adjustable beam interruption time
- ❖ Type C relay for various applications
- ❖ Integrated tamper switch, open when the housing is removed
- ❖ Optional beam frequency, suitable for long-distance and stacking applications
- ❖ The nixie tube displays the received signal strength for easy debugging
- ❖ Wide voltage (12V-24V) and energy-saving design
- ❖ Digital communication function
- ❖ High density waterproof: IP65



Product parameters

Parameters	
Three beam detection mode	Three infrared beams are cut off at the same time for detection
Interruption time	50ms, 100ms, 250ms, 500ms (optional)
Beam frequency	4 options
Alarm cycle	2s, 50ms
Alarm output	The relay is connected to power output 1C, and the contact capacity is DC30V 0.2A max
Tamper switch	Normally closed, open when the housing is removed
Working temperature	-25°C-55°C
Ambient humidity	95% max
Correction angle	Horizontal 180° ($\pm 90^\circ$), vertical 90° ($\pm 10^\circ$)
Communication	
Output signal	RS485
Warranty	
Warranty period	/
Machinery	
Size	Bottom diameter 90mm, height 270mm
Weight	1,250g
Power	
Power	10V-24V DC

Application

It can be widely used in home anti-theft, balcony anti-theft, door and window anti-theft, etc.

Ordering Guide

- ❖ PSS-333081 sensor is a sensor only, it needs to use with WxS terminals to combine to different product series; On the basis of the combination, multiple PSS sensors can be loaded through the Multiple Purpose Interface (MPI) of the intelligent IoT terminal.
- ❖ According to the specific scenario of use case, the enclosure and antenna of intelligent IoT terminal will be replaced to ensure the product quality and performance.
- ❖ PSS sensors can be integrated with the WxS terminal via the MPI interface to form different product series.
- ❖ Example of products are as follows:
 - WxS7800-333081 WiFi Series Infrared grating radiation perimeter alarm Smart Sensor & RTU 2-in-1 Terminal
 - WxS8800-333081 LoRaWAN Series Infrared grating radiation perimeter alarm Smart Sensor & RTU 2-in-1 Terminal
 - WxS9800-333081 NB-IoT (China) Series Infrared grating radiation perimeter alarm Smart Sensor & RTU 2-in-1 Terminal
 - WxS9900-333081 NB-IoT (Global) Series Infrared grating radiation perimeter alarm Smart Sensor & RTU 2-in-1 Terminal
 - WxSC800-333081 LTE Cat1 Series Infrared grating radiation perimeter alarm Smart Sensor & RTU 2-in-1 Terminal
 - WxSC900-333081 LTE Cat1 w/GPS Series Infrared grating radiation perimeter alarm Smart Sensor & RTU 2-in-1 Terminal
 - WxSD800-333081 LTE Cat4 Series Infrared grating radiation perimeter alarm Smart Sensor & RTU 2-in-1 Terminal
 - CxS1800-333081 Ethernet (RJ45) Series Infrared grating radiation perimeter alarm Smart Sensor & RTU 2-in-1 Terminal