

WxSC800-334062

LTE Cat1 UV radiation Smart Sensor & RTU 2-in-1 Terminal

Product Highlights

- ❖ LTE Cat1 UV radiation Smart Sensor & RTU 2-in-1 Terminal
- ❖ 2-in-1 smart sensor(s) and RTU terminal product
- ❖ Optional DC 12V power supply
- ❖ Optional Battery power supply (ER34615H 19,000mAh/ER34615M 13,500mAh)
- ❖ It can monitor the ultraviolet radiation of 0~5mw/cm², with stable performance
- ❖ Expandable with 2 of 14 types PSS gas sensors with aluminum sleeve enclosure
- ❖ Up to 8 working simultaneously including sensors and controllers; Customization needed if more than 8 working at the same time
- ❖ RTU controlling signal and interfaces OD/PWR triggered by sensor(s) data or OTA command for solenoid valve or other devices
- ❖ Optional (Public/Private) IoT cloud platform PolySuite iView

Products includes following parts:

- ❖ WxSC800 LTE Cat1 Smart IoT and RTU 2-in-1 Terminal
- ❖ ENC-102001 WxS Series 4.0 Enclosure(ϕ 145x90x55mm, IP67)
- ❖ PSS-334062 UV radiation sensor (Range:0~5mw/cm², indoor,DC12V)

Configuration Tool

- ❖ iEdge4.0 WxS IoT Terminal products can be configured with PolySuite software-visual based Configuration Tool or CLI interface command or OTA via IoT platform, such as PolySuite PaaS platform iView.
- ❖ Download link <http://ota.polysense.online/wincc/ConfigurationTool.rar>

Product Image

- ❖ The shell is WxS Series 4.0 Enclosure(ϕ 145x90x55mm, IP67) , as shown in the figure below
- ❖ The sensor is externally connected. See the following document PSS-334062 for the sensor picture



WxSC800

LTE Cat1 Smart IoT and RTU 2-in-1 Terminal

Related Products

Product .	Interf.	Descriptions
WxSC800	11MPI+RS485+OD*2+PWR*2	LTECat1 Smart IoT and RTU 2-in-1 Terminal(Inc.WxSC8xx,PSM-xx00,PSB-BD01,&Enclosure)
WxSC801	RS485+OD*2+PWR*2	LTECat1 Smart IoT and RTU 2-in-1 Terminal (Inc.WxSC8xx,PSM-xx01,PSB-BD01,&Enclosure)
WxSC802	0-20mA*1+OD*2+PWR*2	LTECat1 Smart IoT and RTU 2-in-1 Terminal(Inc.WxSC8xx,PSM-xx02,PSB-BD01,&Enclosure)
WxSC803	0-20mA*4+OD*2+PWR*2	LTECat1 Smart IoT and RTU 2-in-1 Terminal(Inc.WxSC8xx,PSM-xx03,PSB-BD01,&Enclosure)
WxSC804	0-3.3V*2+OD*2+PWR*2	LTECat1 Smart IoT and RTU 2-in-1 Terminal(Inc.WxSC8xx,PSM-xx04,PSB-BD01,&Enclosure)
WxSC805	0-3.3V*4+OD*2+PWR*2	LTECat1 Smart IoT and RTU 2-in-1 Terminal(Inc.WxSC8xx,PSM-xx05,PSB-BD01,&Enclosure)
WxSC806	0-10V*2+OD*2+PWR*2	LTECat1 Smart IoT and RTU 2-in-1 Terminal(Inc.WxSC8xx,PSM-xx06,PSB-BD01,&Enclosure)
WxSC807	0-10V*4+OD*2+PWR*2	LTECat1 Smart IoT and RTU 2-in-1 Terminal(Inc.WxSC8xx,PSM-xx07,PSB-BD01,&Enclosure)
WxSC808	PT100*1+OD*2+PWR*2	LTECat1 Smart IoT and RTU 2-in-1 Terminal(Inc.WxSC8xx,PSM-xx08,PSB-BD01,&Enclosure)
WxSC809	PT100*5+OD*2+PWR*2	LTECat1 Smart IoT and RTU 2-in-1 Terminal(Inc.WxSC8xx,PSM-xx09,PSB-BD01,&Enclosure)
WxSC80A	Switch*1+OD*2+PWR*2	LTECat1 Smart IoT and RTU 2-in-1 Terminal(Inc.WxSC8xx,PSM-xx0A,PSB-BD01,&Enclosure)
WxSC80B	Switch*5+OD*2+PWR*2	LTECat1 Smart IoT and RTU 2-in-1 Terminal(Inc.WxSC8xx,PSM-xx0B,PSB-BD01,&Enclosure)
WxSC80C	Unibus*1+OD*2+PWR*2	LTECat1 Smart IoT and RTU 2-in-1 Terminal(Inc.WxSC8xx,PSM-xx0C,PSB-BD01,&Enclosure)
WxSC80D	Unibus*18+OD*2+PWR*2	LTECat1 Smart IoT and RTU 2-in-1 Terminal(Inc.WxSC8xx,PSM-xx0D,PSB-BD01,&Enclosure)
WxSC80E	IIC*1+OD*2+PWR*2	LTECat1 Smart IoT and RTU 2-in-1 Terminal(Inc.WxSC8xx,PSM-xx0E,PSB-BD01,&Enclosure)
WxSC80F	SPI*1+OD*2+PWR*2	LTECat1 Smart IoT and RTU 2-in-1 Terminal(Inc.WxSC8xx,PSM-xx0F,PSB-BD01,&Enclosure)
WxSC80G	Uart*2+OD*2+PWR*2	LTECat1 Smart IoT and RTU 2-in-1 Terminal(Inc.WxSC8xx,PSM-xx0G,PSB-BD01,&Enclosure)
WxSC80H	Uart*3+OD*2+PWR*2	LTECat1 Smart IoT and RTU 2-in-1 Terminal(Inc.WxSC8xx,PSM-xx0H,PSB-BD01,&Enclosure)
WxSC80J	Uart*1+RS485+OD*2+PWR*2	LTECat1 Smart IoT and RTU 2-in-1 Terminal(Inc.WxSC8xx,PSM-xx0J,PSB-BD01,&Enclosure)
WxSC850	Ai/Ao/Di/Pi/Ro/IIC/SPI/Ci + RS232/485/Ro/RJ45	LTE Cat1 Smart RTU

Product Highlights

- ❖ Interfaces supported:
 - MPI:(AIN(0-20mA)*2, PT100*1, VIN(0-10V/0-3.3V)*2, Switch*1 ,Unibus*1, IIC *1, SPI*1, Uart(3.3V TTL)*2), RS485*1
 - RTU interfaces
 - OD*2 output for external devices controlling
 - PWR*2 output for external devices/sensors power supply or customization usage
- ❖ 2-in-1 DC(5V/12V)+Battery(3.6V Li-SOCl2 ER34615H/M) Power Supply, DC in priority
- ❖ Up to 8 working simultaneously including sensors and controllers; Customization needed if more than 8 working at the same time
- ❖ Built-in sensor options including:
 - PSS-403011 IIC Temperature and Humidity Sensor (Indoor)
 - PSS-403012 RS485 Temperature and Humidity Sensor (Indoor)
 - PSS-403013 IIC Temperature and Humidity Sensor (IP67,Outdoor)
 - PSS-403014 RS485 Temperature and Humidity Sensor (IP67,Outdoor)
 - PSS-403015 IIC Temperature and Humidity Sensors (Indoor)

- PSS-403016 RS485 Temperature and Humidity Sensors (Indoor)
- PSS-403017 IIC Temperature and Humidity Sensors (IP67,Outdoor)
- PSS-403018 RS485 Temperature and Humidity Sensors (IP67,Outdoor)
- PSS-403019 IIC Temperature and Humidity Sensors (Indoor)
- PSS-40301A RS485 Temperature and Humidity Sensors (Indoor)
- PSS-40301B IIC Temperature and Humidity Sensors (IP67,Outdoor)
- PSS-40301C RS485 Temperature and Humidity Sensors (IP67,Outdoor)
- PSS-33B011 RS485 illumination Sensor(Indoor)
- PSS-423011 Uart AQI(PM2.5/10, SO2,NO2, O3, CO,Temp,Humidity) PPM Level Sensors
- PSS-423031 Uart IAQ(PM2.5/10, CO2, HCHO, Temp,Humidity) Sensors
- PSS-423041 Uart IAQ(PM2.5/10, CO2, TVOC, Temp,Humidity) Sensors
- PSS-423051 Uart IAQ(PM2.5/10, CO2, HCHO, TVOC,Temp,Humidity)Sensors
- PSS-318711 Uart GPS/Beidou Positioning Sensor
- PSS-318712 RS485 GPS/Beidou Positioning Sensor
- PSS-319311 0-3.3V Tilt / Inclination Sensor (SHM- Structure Health Monitoring)
- PSS-333051 0-3.3V PIR Sensor (3-4 Meters)
- PSS-333052 0-3.3V PIR Sensor (up to 20 Meters)
- PSS-334061 0-3.3V UV Sensor (Range:0-15 grade, outdoor)
- PSS-355051 Switch Uni-Call Button&Controller
- PSS-362011 Uart Sound/Noise Sensor (30~130dB range, Indoor)
- All Gas Sensors with Product No. PSS-21xxxx

❖ Support 1-8 enclosure externally connected sensors

- All enclosure external PSS sensors w/o separate power supply

❖ RTU OD&PWR(PWM) output control inferences

- OD output control interface for controlling external devices such as electric relay,AC contactor, beeper, draught fan, lamps and lantern etc.
- PWR*2 output, one default for external devices/sensors power supply voltage output, one with 3.3V voltage; or customization usage,such as for PWM port
- PWR port signal can be used as PWM output to control stepper moter or lamp
- Sensor(s) data or OTA Command triggered OD/PWR controlling signal&interfaces

❖ Power supply options:

- PSB-BT01 WxS Terminal Battery Power (3.6VDC Output) (3.6V Li-SOCI2 ER34615H/M)
- PSB-BT02 WxS Terminal Battery Power Board (3/5/9/12VDC Output) (3.6V Li-SOCI2 ER34615H/M)
- PSB-DC01 WxS Terminal DC Power Board (Inc.PSP-DC012V)
- PSB-BD01 WxS Terminal Battery (3.6V Li-SOCI2 ER34615H/M)&DC Power Board(Inc.PSP-DC012V)
- Battery capacity ER34615H: 19000mAh/ER34615M: 13500mAh

❖ iEdge 4.0 terminal enclosure options

- ENC-102001 WxS Series 4.0 Enclosure(φ145x90x55mm, IP67)
- ENC-102002 WxS Series 4.0 Poromeric Enclosure(φ145x90x59mm)

- ENC-102003 WxS Series 4.0 High Poromeric Enclosure(ϕ 145x90x70mm)
- ❖ Terminal and sensor parameters configurable with Configuration Tool running on PC
 - LTE Cat1 Bands Supported and SW Configurable
 - LTE Cat1 Uplink Transmission Cycle Configurable
 - Sensor Parameters Configurable
 - Sensor Data Report Cycle Configurable
- ❖ FOTA (Over The Air) firmware upgrade, including to upgrade loader and application images
- ❖ OTA (Over The Air) terminal running parameters supported including output signal
- ❖ Low power consumption, years of battery operational life with 3.6V Li-SOCl₂ ER34615H/M Battery with various scenarios
- ❖ Integrated internal antenna, or optional external SMA/IPEX antenna
- ❖ LTE Cat1 Compliance

Specifications

Parameters	Value
Smart Terminal	
Interfaces	MPI Interfaces-Any Mixture of Following: MPI:(AIN(0-20mA) *2, PT100 *1, VIN(0-10V/0-3.3V) *2, Switch *1 ,Unibus*1, IIC *1, SPI*1, Uart(3.3V TTL)*2), RS485*1 Output Control: OD*2&PWR*2
Data Report	Cross-threshold report, plus periodic report (the threshold and the periodic report cycle are both user-configurable)
Intensive data sampling and averaging	Support intensive data sampling and averaging to improve data accuracy
Wireless	
Regional Parameters	LTE-TDD:B34/B38/B39/B40/B41 LTE-FDD:B1/B3/B5/B8
Data	LTE-TDD: Up and down matching 2 8Mbps (DL) max/2Mbps (UL) max Up and down matching 1 6Mbps (DL) max/4Mbps (UL) max LTE-FDD: Max 10Mbps (DL)/Max 5Mbps (UL)
Sensitivity	FDD B1: -99dBm (10M) FDD B3: -99dBm (10M) FDD B5: -99dBm (10M) FDD B8: -99dBm (10M) TDD B34: -100dBm (10M) TDD B38: -100dBm (10M) TDD B39: -100dBm (10M) TDD B40: -100dBm (10M) TDD B41: -100dBm (10M)
Bandwidth	1.4/3/5/10/15/20MHz



Output power	LTE-TDD: Class3 (23dBm+1/- 3dB) LTE-FDD: Class3(23dBm+-2dB)
Power consumption	1uA @ power off 0.6mA @ Sleep, typical
Interface	1 USB 2.0 high-speed interface (up to 480Mbps); Dual 1.8V/3.0V (U) SIM card interface 2 NETLIGHT interfaces (NET_STATUS and STATUS) 1 channel digital I2S interface, supporting external codec 3 UART interfaces (main serial port, universal serial port, debugging serial port) 1 SPI LCD interface 1 SPI Camera interface PWRKEY (valid at low level) 1 channel ADC interface
Antenna	Integrated internal antenna or external 1/2 wavelength whip antenna (SMA)
Mechanical	
Dimension	3 Enclosure options with different size WxS Series 4.0 Enclosure(φ145x90x55mm, IP67) WxS Series 4.0 Poromeric Enclosure(φ145x90x59mm) WxS Series 4.0 High Poromeric Enclosure(φ145x90x70mm)
IP rating	IP65&IP67
Operating Temperature	-40C to +85C
Total Weight	150 g
Electrical	
Supply Voltage	3.6VDC
Power Type	Replaceable 1 ER34615H/M 3.6V Li-SOCI2 Battery (H/M); DC 4.5V – 12V optional



Configuration Tool

- ❖ iEdge4.0 WxS IoT Terminal products can be configured with PolySuite software-visual based Configuration Tool or CLI interface command or OTA via IoT platform, such as PolySuite PaaS platform iView.
- ❖ Download link <http://ota.polysense.online/wincc/ConfigurationTool.rar>

Installation Guide


- ❖ Below diagram shows the general installation guide for WxSC800, it can be installed on any flat and solid surface:

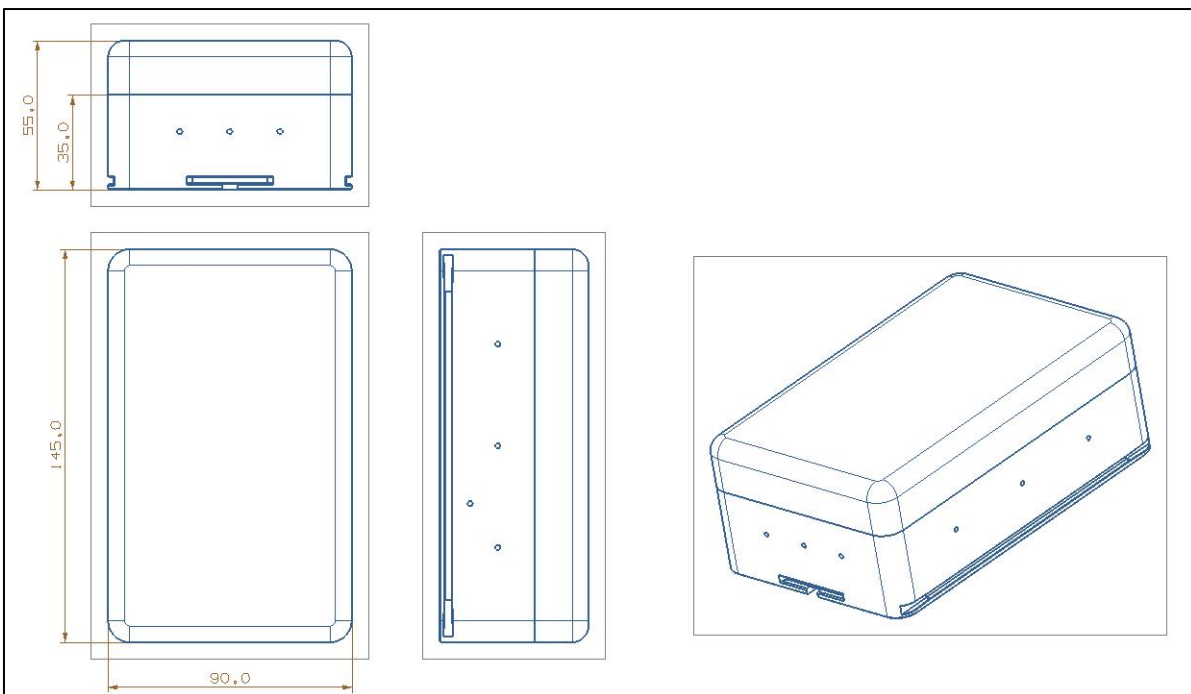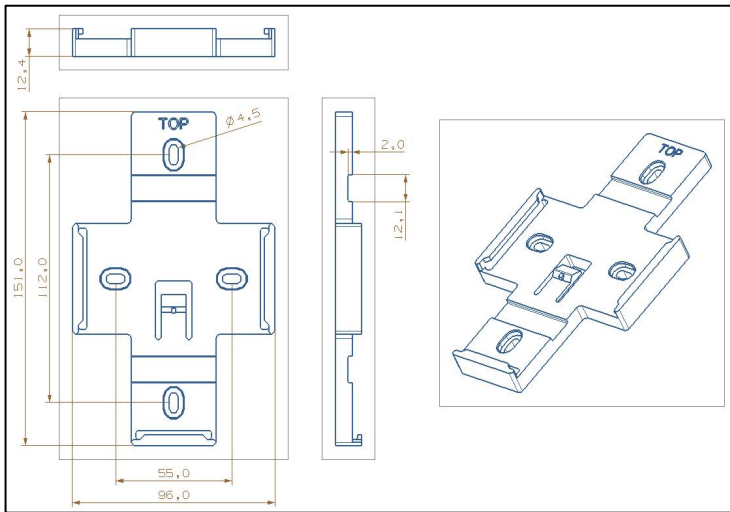

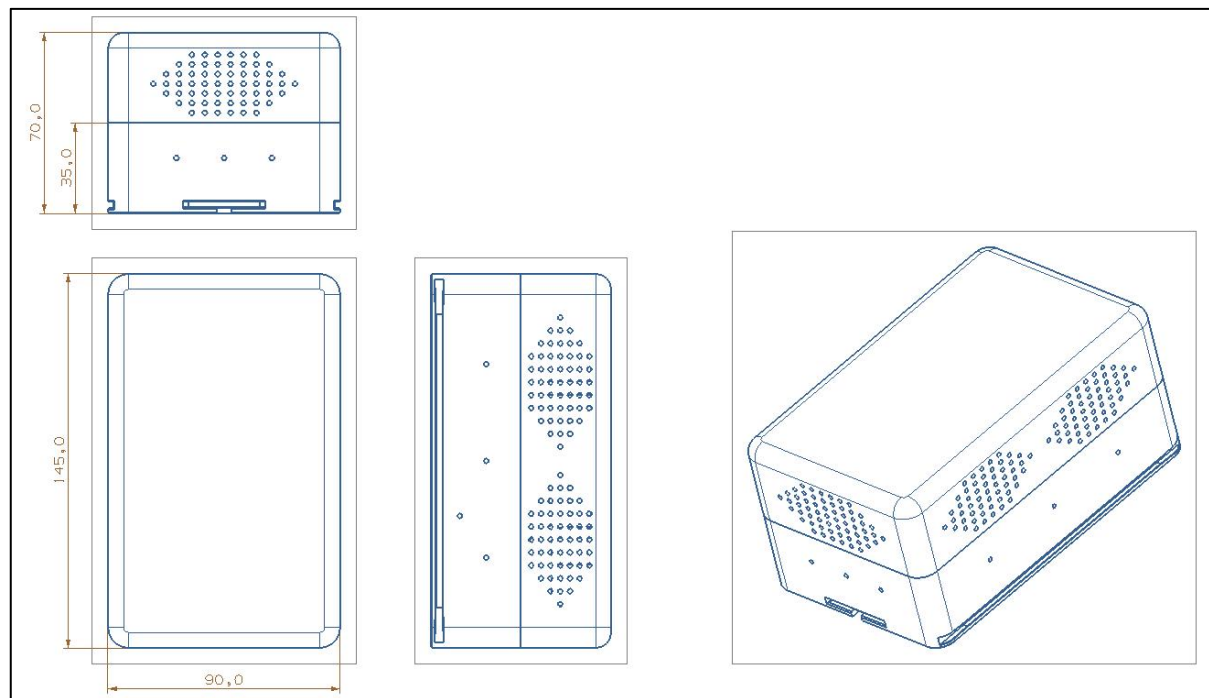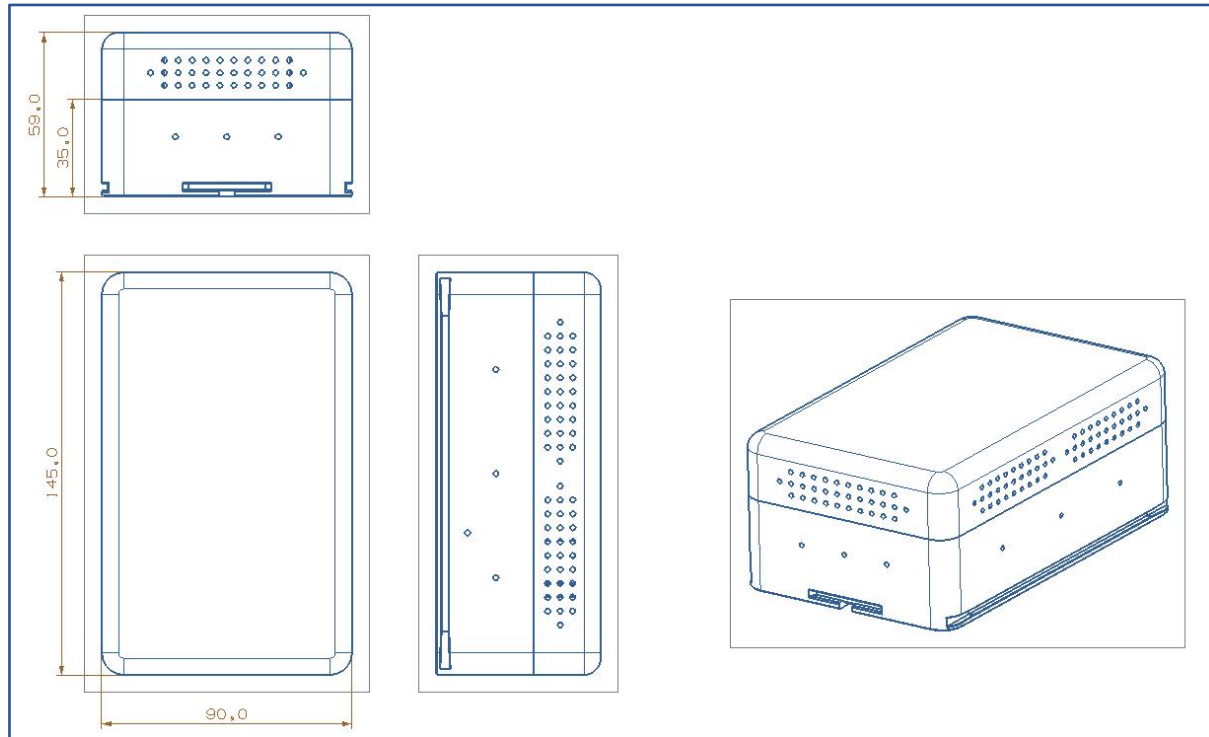

- ❖ Below is the recommendation of the self-tapping screw and its sizes:

螺纹规格		ST2.2	ST2.9	ST3.5	ST4.2	ST4.8	ST5.5	ST6.3
dk	min	3.7	5.3	6.64	7.64	9.14	10.57	11.57
K	min	1.4	2.15	2.35	2.8	3.4	3.7	4.3
m		1.9	3	3.9	4.4	4.9	6.4	6.9
L		4.5mm~100mm						

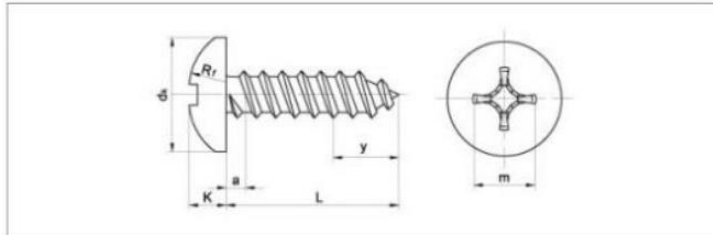

Product Images

- ❖ WxS Series 4.0 Enclosure(φ145x90x55mm, IP67)



❖ WxS Series 4.0 Poromeric Enclosure(φ145x90x59mm)



❖ WxS Series 4.0 High Poromeric Enclosure(φ145x90x70mm)



PSS-334062

UV Sensor

Related Products

Product.	Interf.	Descriptions
PSS-334061	0-3.3V	UV Sensor (Range:0-15 grade, outdoor)
PSS-334062	0-3.3V	UV radiation sensor (Range:0~5mw/cm ² , indoor,DC12V)

Product introduction

PSS-334062 The ultraviolet sensor, with a range of 0~5mw/cm², is suitable for indoor use. It is a signal transmitter specially designed for detecting the intensity of ultraviolet lamps. The imported UV probe is selected with stable performance.

Detection principle

The ultraviolet signal is converted into an electrical signal by a photosensitive element.

Product features

- ❖ Detection Monitoring range: 0 ~ 5mw/cm²
- ❖ Imported UVC sensor with stable performance
- ❖ No visible light effect, peak response spectrum $\lambda_p=254\text{nm}$
- ❖ Standard industrial signal, 0~5VDC linear voltage output, convenient for industrial application
- ❖ High measurement accuracy, resolution up to 0.001 W/m²
- ❖ Wide operating temperature range: 0 °C~+80 °C, temperature drift coefficient:<- 0.1%/°C
- ❖ Ultra low power consumption, complete power consumption<0.5W



Product parameters

Parameters	
Measuring range	0~5mw/cm ² (can be preset)
Response spectrum range	254nm ± 5nm
Peak response spectrum	254nm
Load impedance	>5.1K Ω
Wiring mode	Three wire system
Interface	
Output	0-5VDC
Warranty	
Warranty period	1year
Mechanics	
Operating temperature	0 °C~+80 °C
Storage temperature	- 20 °C ~ 100 °C
Probe housing material	Aluminum
Transmitter housing dimension	φ35.5×23.5 (mm)
Connection mode	Back hole installation
Output cable specification	AVVR 3 × 0.3 0.5m long, 5mm tin plated on the outlet

Power

Power

6~24V DC

Application

It is specially used to detect the intensity of ultraviolet lamp tubes, which can be used in industrial and medical industries.

Ordering Guide

- ❖ PSS-334062 sensor is a sensor only, it needs to use with WxS terminals to combine to different product series; On the basis of the combination, multiple PSS sensors can be loaded through the Multiple Purpose Interface (MPI) of the intelligent IoT terminal.
- ❖ According to the specific scenario of use case, the enclosure and antenna of intelligent IoT terminal will be replaced to ensure the product quality and performance.
- ❖ PSS sensors can be integrated with the WxS terminal via the MPI interface to form different product series.
- ❖ Example of products are as follows:
 - WxS7800-334062 WiFi Series UV radiation Smart Sensor & RTU 2-in-1 Terminal
 - WxS8800-334062 LoRaWAN Series UV radiation Smart Sensor & RTU 2-in-1 Terminal
 - WxS9800-334062 NB-IoT (China) Series UV radiation Smart Sensor & RTU 2-in-1 Terminal
 - WxS9900-334062 NB-IoT (Global) Series UV radiation Smart Sensor & RTU 2-in-1 Terminal
 - WxSC800-334062 LTE Cat1 Series UV radiation Smart Sensor & RTU 2-in-1 Terminal
 - WxSC900-334062 LTE Cat1 w/GPS Series UV radiation Smart Sensor & RTU 2-in-1 Terminal
 - WxSD800-334062 LTE Cat4 Series UV radiation Smart Sensor & RTU 2-in-1 Terminal
 - CxS1800-334062 Ethernet (RJ45) Series UV radiation Smart Sensor & RTU 2-in-1 Terminal